

CircuitSolver® Union Cold Water Assembly (CSUA-CW)
 [Thermostatic balancing valve with integrated union body and ball valves]
SUBMITTAL

JOB:	ORDER NO:	DATE:
	SUBMITTED BY:	DATE:
UNIT TAG:	APPROVED BY:	DATE:
CITY:	ENGINEER:	BUILDING TYPE:
STATE:	CONTRACTOR:	CONSTRUCTION TYPE:
COMPLETION DATE:		

DESCRIPTION

The CircuitSolver® Union Cold Water Assembly's primary component is the CircuitSolver® Cold Water valve which is a self-acting thermostatic recirculation valve that automatically and continuously adjusts flow to maintain the desired temperature in a domestic cold water supply line. Since the CircuitSolver® responds to water temperature to control the flow entering the recirculation line it eliminates the need to manually balance the system.



DIMENSIONS

Item No.	Part Number	Description	Qty.	Item No.	Part Number	Description	Qty.	Item No.	Part Number	Description	Qty.
1	263-20X100-XXX	½" CIRCUITSOLVER® COLD WATER THERMOSTATIC BALANCING VALVE W/ INTEGRATED UNION	1	1	263-30X100-XXX	¾" CIRCUITSOLVER® COLD WATER THERMOSTATIC BALANCING VALVE W/ INTEGRATED UNION	1	1	263-40X100-XXX	1" CIRCUITSOLVER® COLD WATER THERMOSTATIC BALANCING VALVE W/ INTEGRATED UNION	1
2	92-160	BALL VALVE, ½" MxF, LF	2	2	92-158	BALL VALVE, ¾" MxF, LF	2	2	92-170	BALL VALVE, 1" MxF, LF	2

*ALL COMPONENTS ARE LEAD FREE

*ALL COMPONENTS ARE LEAD FREE


*ALL COMPONENTS ARE LEAD FREE

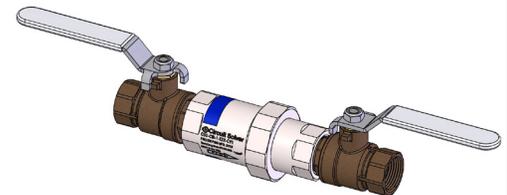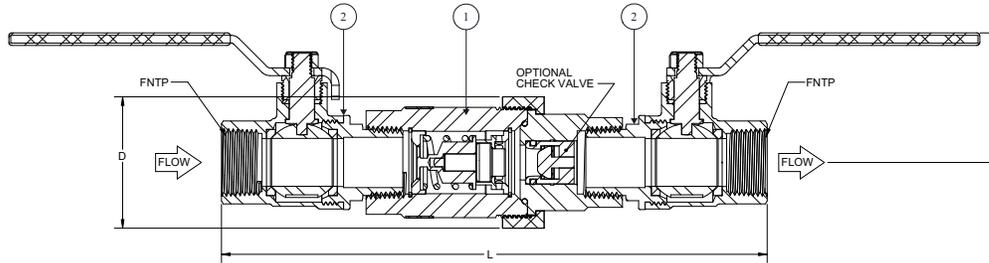

Model No.	NPT	Diameter (D)		Length (L)		Height (H)		Weight		C _v			Max. Pressure		Max. Temp.	
		IN	MM	IN	MM	IN	MM	LBS.	KG	OPEN	CLOSED	DESIGN	PSIG	BAR	°F	°C
CSUA-CW -½-XXX	1/2"	1.8	46	7.7	196	1.8	46	2.1	1.0	1.0	0.3	0.65	200	14	250	121
CSUA-CW-½-XXX-CV1																
CSUA-CW-¾-XXX	3/4"	2.0	51	8.9	226	2.0	51	3.4	1.5	1.4	0.3	0.85				
CSUA-CW-¾-XXX-CV1																
CSUA-CW-1-XXX	1"	2.5	64	10.5	267	2.3	59	5.4	2.5	2.7	0.3	1.5				
CSUA-CW-1-XXX-CV1																


Model Number Selection

XXX refers to the desired opening temperature. When the water temperature rises above this point the CircuitSolver® will begin to open, allowing water to easily enter the return line. For example, if you want 65°F desired return temperature and the CSUA-CW is to be installed on a 3/4" line, the model number would be CSUA-CW-3/4-65. To add optional check valve insert -CV1 directly after the temperature designation in the model number, Ex. CSUA-CW-3/4-65-CV1.

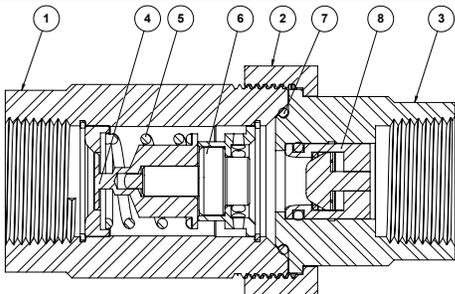MATERIALS		
		
ITEM	DESCRIPTION	MATERIAL
1	Valve Body w/ Union Threads	300 series stainless steel
2	Union Nut	300 series stainless steel
3	Female Threaded Insert	300 series stainless steel
4	Plug	300 series stainless steel
5	Operating Spring	300 series stainless steel
6	Thermal Actuator	300 series stainless steel
7	O-Ring	Buna-N
8	Check Valve (optional)	GLASS FILLED NORLYL

OPTIONAL CHECK VALVE	
Features and Benefits	
-100% factory tested drip tight operation	
-Snap fit design, no retainer needed	
-Extra-low head loss and low cracking pressure	
-External O-ring in groove	
Certifications	
-ANSI/ NSF 61	
ITEM	MATERIAL
Cap	Glass filled Noryl
Guide	Glass filled Noryl
Plunger	Glass filled Noryl
Lip Spring	EPDM rubber
Spring	Stainless Steel AISI 301
O-ring	EPDM rubber

FLOW RATE CALCULATION USING "Cv" FACTOR		
$GPM = C_v \sqrt{\Delta P}$	$C_v = \sqrt{\frac{GPM}{\Delta P}}$	$\Delta P = \left[\frac{GPM}{C_v} \right]^2$

OPTIONAL CHECK VALVE TECHNICAL DATA	
Medium: Clear water only	
Approximate Cracking Pressure: 0.29 PSI	
Continuous	Short-term (5 minutes max.)
	
	

TYPICAL SPECIFICATION

- I. Furnish and install CIRCUITSOLVER® UNION COLD WATER ASSEMBLY as indicated on the plans. CIRCUITSOLVER® UNION COLD WATER ASSEMBLY shall be self-contained and fully automatic without additional piping or control mechanisms. Thermostatic valve shall be a CIRCUITSOLVER® as manufactured by ThermOmegaTech®, Inc., or equivalent.
 - A. CIRCUITSOLVER® UNION COLD WATER shall regulate the flow of recirculated domestic cold water based on water temperature entering the CIRCUITSOLVER® UNION COLD WATER ASSEMBLY regardless of system operating pressure. As the water temperature increases, the valve proportionally opens, dynamically adjusting flow to meet the specified temperature.
 1. CIRCUITSOLVER® COLD WATER never fully closes. There is always sufficient bypass flow back to the recirculating pump to prevent overheating or "dead heading" of the pump.
 2. CIRCUITSOLVER® COLD WATER is set at the factory for the desired return temperature. No field adjustments needed. Several temperature set points are available.
 3. CIRCUITSOLVER® UNION COLD WATER ASSEMBLY shall be available in ½", ¾", & 1" with FNPT at both ends.
- II. All components in the CIRCUITSOLVER® UNION COLD WATER ASSEMBLY are made with lead-free materials. The major components that make up the CIRCUITSOLVER® are constructed of type 300 series SS.
 - A. CIRCUITSOLVER® UNION COLD WATER ASSEMBLY shall be rated to 200 PSIG maximum working pressure.
 1. CIRCUITSOLVER® UNION COLD WATER ASSEMBLY shall be standard tapered female pipe thread, NPT.
 - B. CIRCUITSOLVER® UNION COLD WATER ASSEMBLY shall be rated to 250°F (121.1°C) maximum working temperature.
 - C. CIRCUITSOLVER® UNION COLD WATER ASSEMBLY shall be NSF/ANSI/CAN 61 & 372 certified for use in all domestic water systems.
 - D. Thermal actuator shall be spring-loaded and self-cleaning, delivering closing thrust sufficient to keep orifice opening free of scale deposits.
- III. Installation of CIRCUITSOLVER® UNION COLD WATER ASSEMBLY shall be made by qualified tradesmen. Install CIRCUITSOLVER® UNION COLD WATER ASSEMBLY in each domestic cold water return piping branch beyond last cold water device in that branch.
 - A. Provide suitable strainer as indicated in piping detail shown on the drawings.
 - B. Provide suitable access panel as required in non-accessible ceilings and walls.
 - C. Pay close attention to flow arrow, especially with valves that have an integrated check valve.